


- LEGEND:**
- 75mm Ø CLASS 9 PVCu DOMESTIC WATER MAIN BSC
 - 75mm Ø PVC FLANGE ADAPTOR
 - 80 Ø x 430mm G.I DOMESTIC WATER EXTENTION PIECE ONE END PLAIN ONE END BUTTWELDED TO BEND
 - WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
 - 80mm Ø G.I PUDDLE FLANGE
 - 80mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
 - 80 Ø x 1036mm G.I EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
 - CONCRETE ENCASEMENT 25/19MPa


NOTE: ALL FLANGES TO BE T10

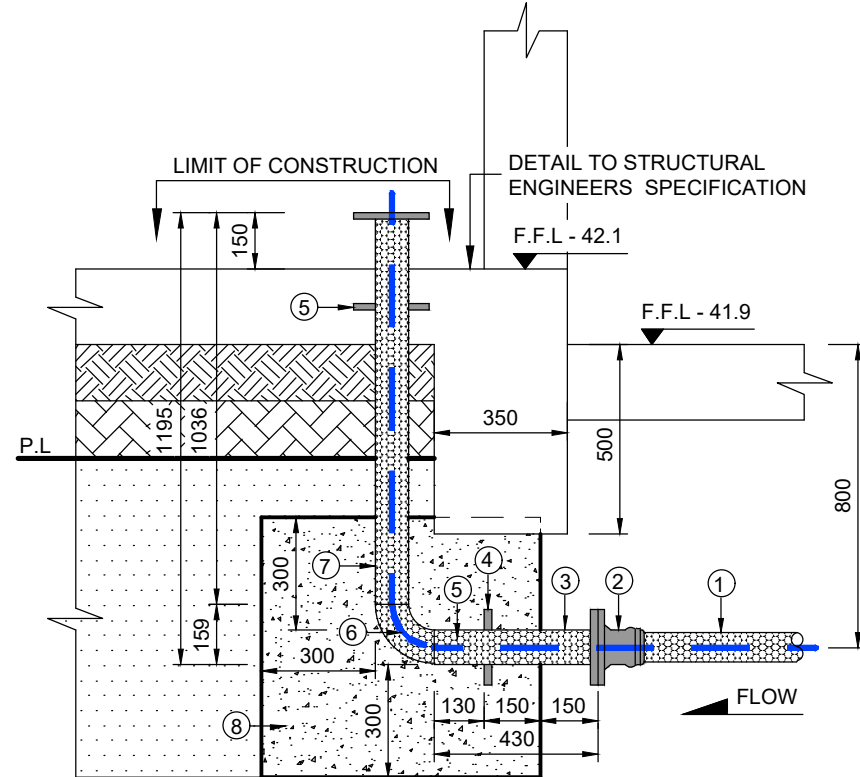

**75mm Ø DOMESTIC WATER
BSC 1 INSTALLATION**
SCALE 1:20

- LEGEND:**
- 100mm Ø CLASS 12 PVCu FIRE MAIN BSC
 - 100mm Ø PVC FLANGE ADAPTOR
 - 100 Ø x 500mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER BUTTWELDED TO BEND
 - 100mm Ø G.I PUDDLE FLANGE
 - WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
 - 100mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
 - 100 Ø x 1928mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
 - CONCRETE ENCASEMENT 25/19MPa


NOTE: ALL FLANGES TO BE T16

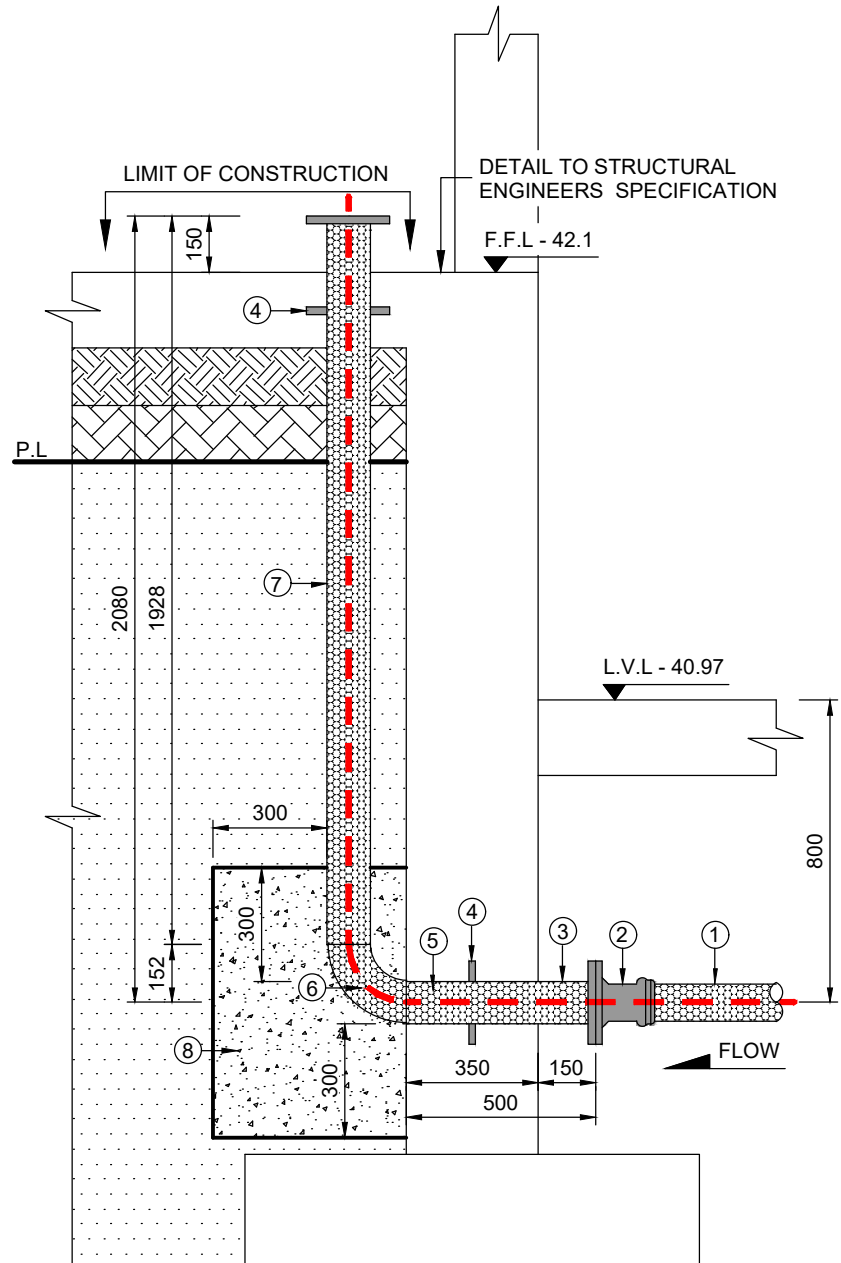

**SOUTH EAST: 100mm Ø G.I
FIRE BSC 2 INSTALLATION**
SCALE 1:20

- LEGEND:**
- 32mm Ø CLASS 10 HDPE DOMESTIC WATER MAIN BSC
 - 32mm Ø PVC FLANGE ADAPTOR
 - 32 Ø x 500mm G.I DOMESTIC WATER EXTENTION PIECE ONE END PLAIN ONE END BUTTWELDED TO BEND
 - WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
 - 32mm Ø G.I PUDDLE FLANGE
 - 32mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
 - 32 Ø x 1601mm G.I EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
 - CONCRETE ENCASEMENT 25/19MPa


NOTE: ALL FLANGES TO BE T10

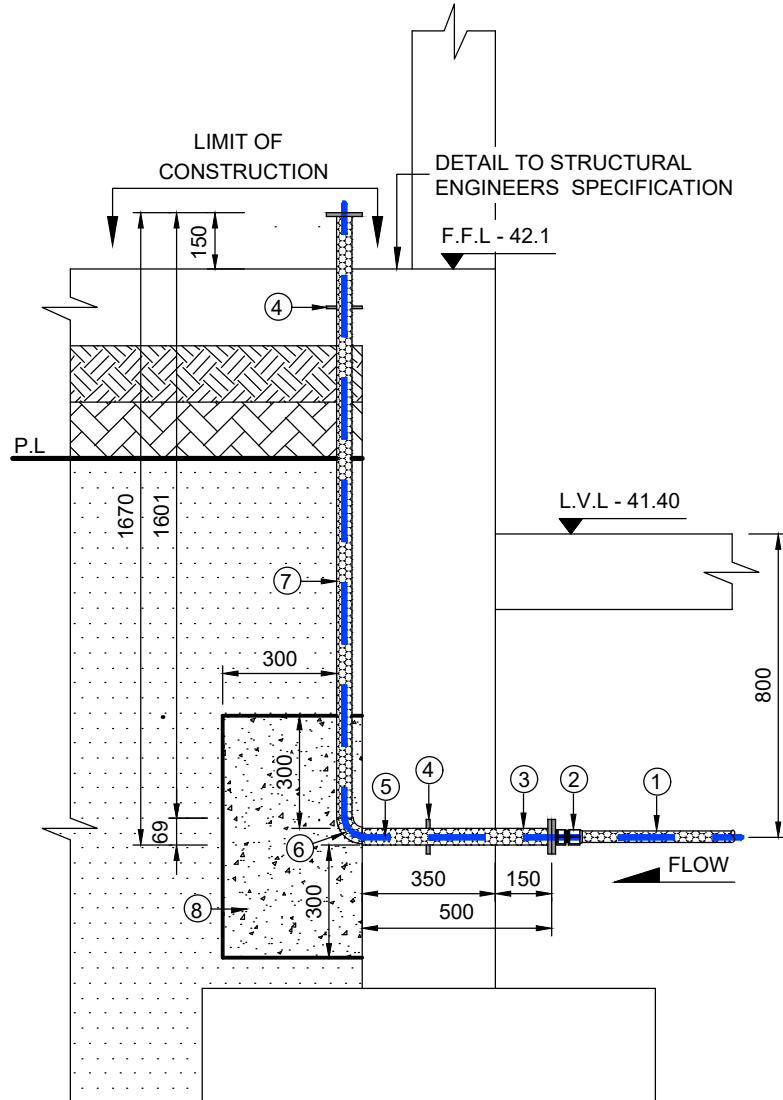

**NORTH EAST: 32mm Ø DOMESTIC
WATER BSC 1 INSTALLATION**
SCALE 1:20

- LEGEND:**
- 100mm Ø CLASS 12 PVCu FIRE MAIN BSC
 - 100mm Ø PVC FLANGE ADAPTOR
 - 100 Ø x 500mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER BUTTWELDED TO BEND
 - 100mm Ø G.I PUDDLE FLANGE
 - WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
 - 10mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
 - 100 Ø x 1458mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER BUTTWELDED TO BEND
 - CONCRETE ENCASEMENT 25/19MPa

NOTE: ALL FLANGES TO BE T16

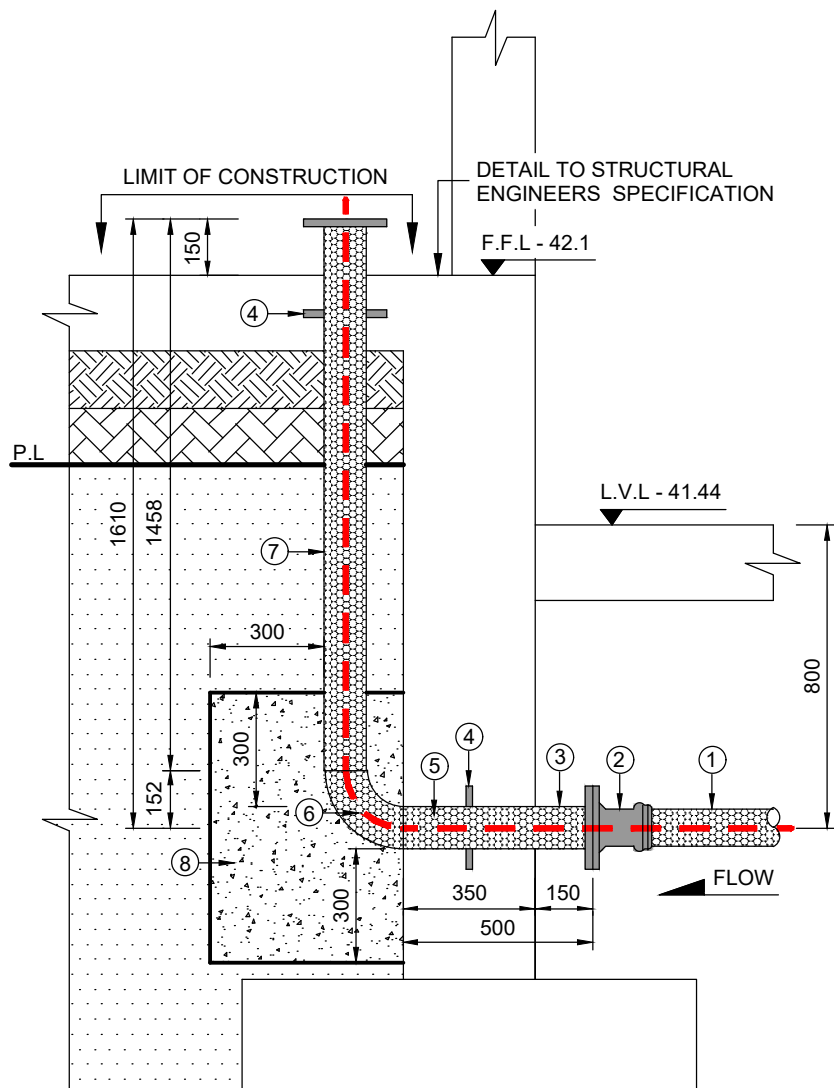


**NORTH EAST: 100mm Ø G.I
FIRE BSC 2 INSTALLATION**
SCALE 1:20

LEGEND:

- 32mm Ø CLASS 10 HDPE DOMESTIC WATER MAIN BSC
- 32mm Ø PVC FLANGE ADAPTOR
- 32 Ø x 500mm G.I DOMESTIC WATER EXTENTION PIECE ONE END PLAIN ONE END BUTTWELDED TO BEND
- WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
- 32mm Ø G.I PUDDLE FLANGE
- 32mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
- 32 Ø x 2152mm G.I EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
- CONCRETE ENCASEMENT 25/19MPa


NOTE: ALL FLANGES TO BE T10

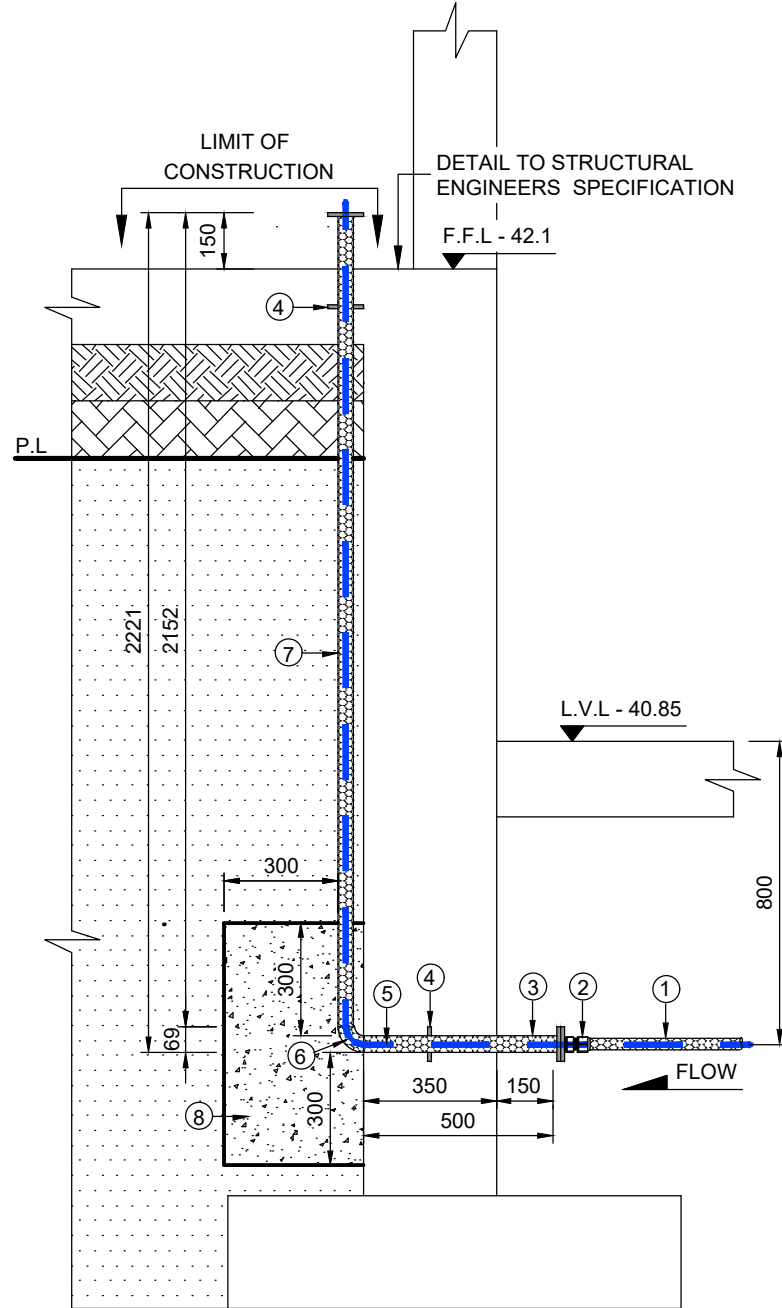

**SOUTH EAST: 32mm Ø DOMESTIC
WATER BSC 1 INSTALLATION**
SCALE 1:20

- LEGEND:**
- 250mm Ø CLASS 20 PVCu FIRE SPRINKLER MAIN BSC
 - 250mm Ø PVC FLANGE ADAPTOR
 - 250 Ø x 500mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
 - 250mm Ø G.I PUDDLE FLANGE
 - WRAPID BOND WRAPPING OF ALL UNDERGROUND STEEL PIPES & FITTING
 - 250mm Ø 90° G.I BUTTWELDED LONG RADIUS BEND
 - 10mm DUCK FOOT PLATE SUPPORT
 - 250 Ø x 1189mm G.I FIRE SPRINKLER EXTENTION PIECE ONE END PLAIN OTHER END BUTTWELDED TO BEND
 - CONCRETE ENCASEMENT 25/19MPa

NOTE: ALL FLANGES TO BE T25

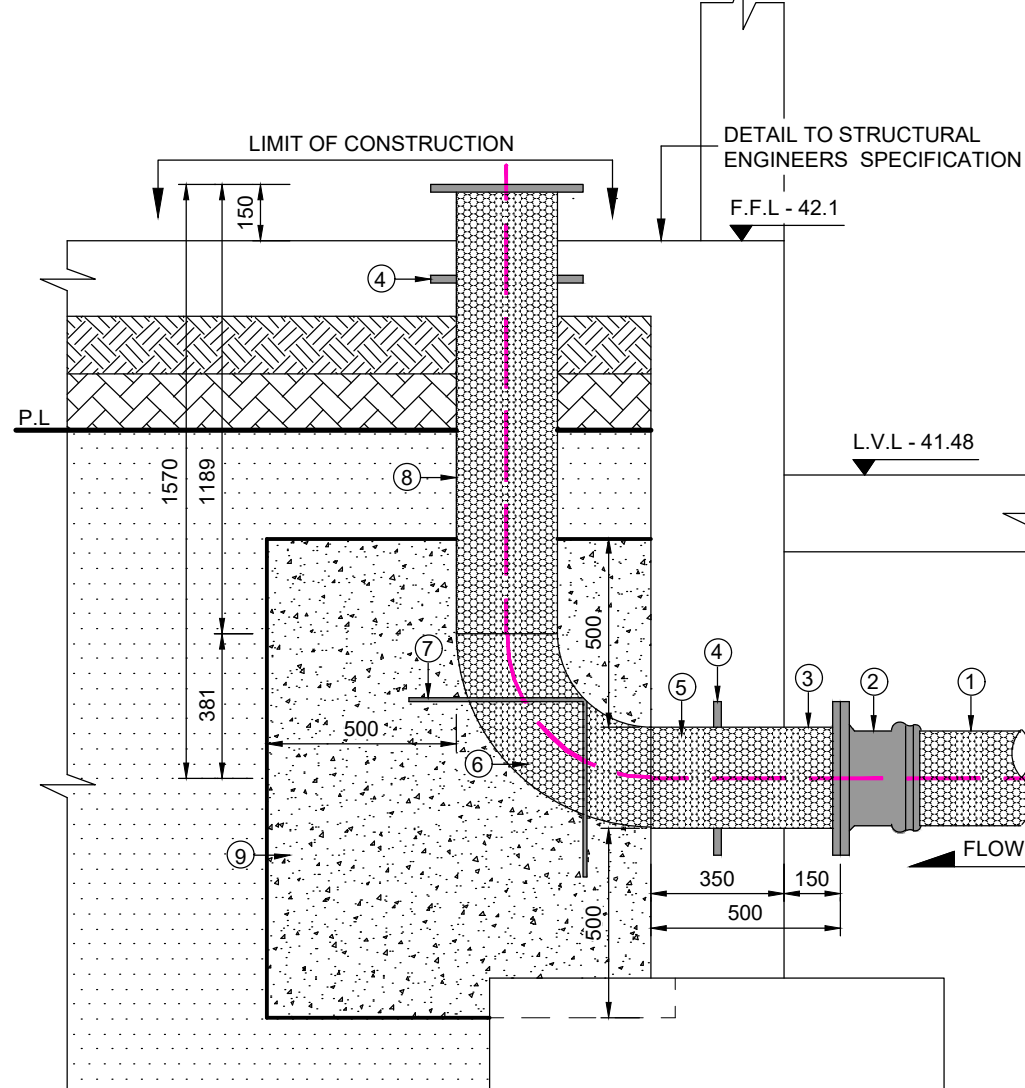

**250mm Ø G.I FIRE SPRINKLER
BCS 3 INSTALLATION**
SCALE 1:20

Osmond Lange Architects and Planners (Pty) Ltd East London

Postal: P O Box 19175, Tecom, 5214

Address: Pilot Mill House The Quarry Selborne, East London

Tel: (043) 721-0033
Fax: (043) 721-0038
Email: en@o-l.co.za

The design and content of this drawing is the property of Osmond Lange Architects and the copyright thereof is reserved by them.

GENERAL NOTE:

- ALL STRUCTURAL, ELECTRICAL, CIVIL AND LANDSCAPING QUERIES ARE TO BE REFERRED TO THE RELEVANT CONSULTANTS DRAWINGS.
- ALL PLUMBING QUERIES ARE TO BE REFERRED TO THE RELEVANT SPECIALIST CONSULTANT DRAWINGS, SPECIFICATIONS AND DETAILS.
- ALL CONCRETE, COLUMN AND STRUCTURAL QUERIES ARE TO BE REFERRED TO THE STRUCTURAL ENGINEER'S DRAWINGS, SPECIFICATIONS AND DETAILS.
- ALL EXTERNAL INTERNAL WALLS REQUIRING BRACING/STIFFENING ARE TO BE CONSTRUCTED IN ACCORDANCE WITH PRE-STRUCTURAL ENGINEER'S DRAWINGS, SPECIFICATIONS AND DETAILS.
- ALL SPECIFICATIONS WITH REGARD TO FIRE REGULATIONS, TO BE REFERRED TO CONSULTANTS DRAWINGS, SPECIFICATIONS AND DETAILS.
- ALL DESIGN AND CONSTRUCTION TO COMPLY WITH THE RELEVANT SANS REGULATIONS.
- ANY DISCREPANCY IN THE DRAWINGS, DIMENSIONS & SPECIFICATIONS TO BE BROUGHT TO THE ATTENTION OF THE CONSULTANT AND ARCHITECT PRIOR TO ANY WORK BEING PUT IN HAND.
- ONLY FIGURED DIMENSIONS TO BE FOLLOWED - SCALED DIMENSIONS OF DRAWINGS WILL NOT BE PERMITTED

No	Date	Revision Description	By
----	------	----------------------	----

PROJECT TEAM

Project Managers :

newground
projects
Newground Projects 17 St Andrews Road, Selborne, East London, 5201 043 722 5864
Louis Fourie
0825766828
Louis@newground.co.za

Principal Agent/ Architects :

OL
OSMOND LANGE
ARCHITECTS & PLANNERS
Osmond Lange Architects and Planners Pilot Mill House, The Quarry, Selborne East London (043) 721-0033
William Martinson
083 3259600
Williamm@o-l.co.za

Quantity Surveyors :

BISWE VAN NIEKERK
Biswe Van Niekerk The Ridge Office Park, 2nd Floor 3 Berea Terrace, Berea, East London 043 721 1043
Willem van Niekerk
0824921055
willem@biswe.co.za

Civil & Structural Engineers :

bvi
BVI Border 1st Floor, Esprit House, St Helena Drive East London, 5241
043 - 722 2738
Werner de Lange
082 578 0514
WernerDL@bvi.co.za

Electrical & Mechanical Engineers :

EVANS
Evans Consulting Engineers cc 17 Surrey Road, Vincent, East London 5247
043 7213192
Darryl Evans 083 7026399
darryl@evansconsulting.co.za

Town Planners :

CS CONSULTING
CS Consulting 12 Pearce Street, Harraway House Berea, East London 5241
Craig Sam
0783267147
Craig@csamconsulting.co.za

CLEINT

east london idz
business streamlined
PO Box 5458, Greenfields East London, 5208
Lower Chester Road Sunningridge, 5201
East London, South Africa
Tel: +27(0)437028200
Fax: +27(0)437366405
Email: info@elidz.co.za

CLIENT APPROVAL :

Cary Whitfield
Project Manager
Tel: 043 7028247
Cell: 082 34632298
E-mail: gary@elidz.co.za

DATE :

TENANT

NAME : TENANT APPROVAL :

DESIGNATION : DATE :

Project

Drawing Title
**DOMESTIC WATER, FIRE & SPRINKLER
SYSTEM BUILDING SUPPLY
CONNECTION DETAILS**

Date	01.05.2019	Drawn	Author
Scale	AS SHOWN	Checked	Checker

Approved

Name: Approver Reg No: PrArch5559
Signature: Date:
Practice: Osmond Lange Architects and Planners

Workstage

FOR INFORMATION

Drawing Number

33722- GW1-DET-18

Revision

2019/05/09 12:02:01 PM