


DESCRIPTION							TYPE
XPANDA ROLLER SHUTTER DOOR TO FIT 2400mm (WIDE) x 2400mm (HIGH) WITH 75mm NATURAL ANODISED SMOOTH SLATS WITH NYLON END LOCKS, GALVANISED AND POWDER COATED SIDE RAIL TO MATCH SLATS. RUBBER STOP ON T-BAR. COLOUR: NATURAL ANODISED - ALUMINIUM. SUPPLIED WITH CHAIN FOR MANUAL OPERATION. ALL TO BE INSTALLED TO MANUFACTURERS DETAILED INSTALLATION INSTRUCTIONS COMPLETE WITH MANUFACTURER GUARANTEES.							RS-1


DOOR NO	ROOM DESCRIPTION		ACTIVE NO.	HAND LEAF	HAND	DOOR CONSTRUCTION		GLAZING
	NAME					WIDTH	HEIGHT	
36	CIRCULATION 1		018			2400	2400	N/A
37	STORE ROOM 2		038			2400	2400	N/A
38	STORE ROOM 1		039			2400	2400	N/A

IRONMONGERY SET - 19

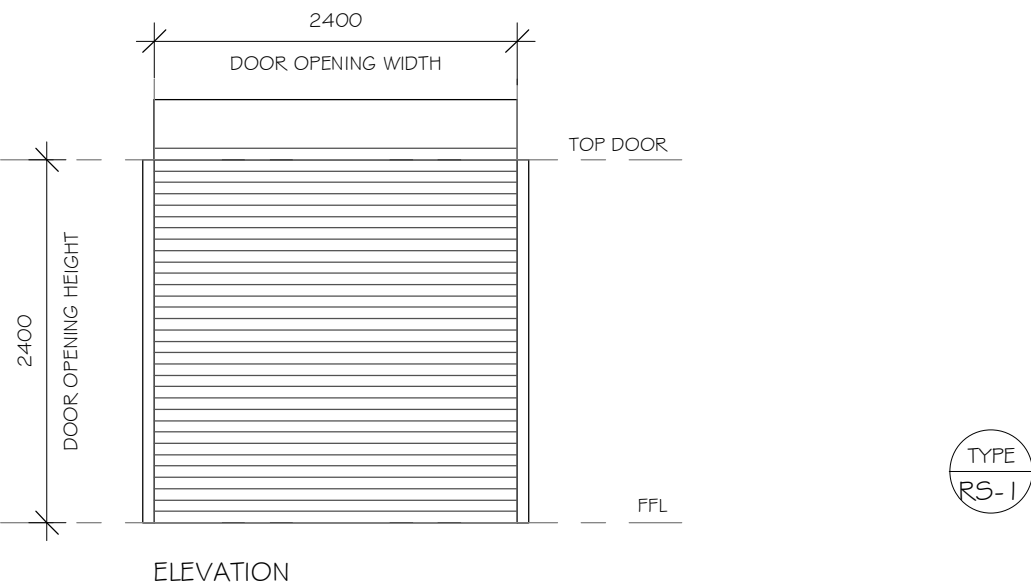

DESCRIPTION							TYPE
2500mm (w) x 2500mm (h) RICHARDS-WILCOX OR OTHER EQUALLY APPROVED INDUSTRIAL 45mm THICK LOW HEAD ROOM SECTIONAL OVERHEAD DOOR. ALUMINIUM SECTIONS INFILLED WITH POLYURETHANE FOAM, STUCCO-TEXTURED INSIDE AND OUTSIDE WITH UNIFORM HORIZONTAL RIBBING. ELECTRICALLY OPERATED. Colour : SILVER STUCCO EMBOSSED							RS-2

DOOR NO	ROOM DESCRIPTION		ACTIVE NO.	HAND LEAF	HAND	DOOR CONSTRUCTION		GLAZING
	NAME					WIDTH	HEIGHT	
34	RECEIVING AREA		036			2500	2500	N/A

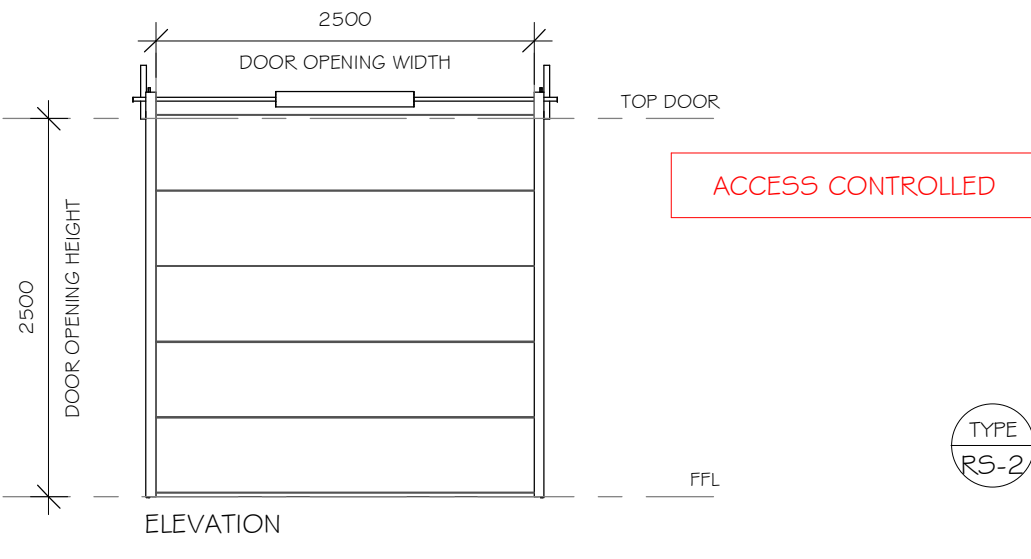

The design and content of this drawing is the property of Osmond Lange Architects and the copyright thereof is reserved by them.

A	16-03-20	DOORS REVISED	PM
No	Date	Revision Description	By



Osmond Lange Architects and Planners
17 Quarry Road, The Quarry, Selborne
East London
(043) 721-0033
Willen van Niekkerk
0832198500
willen@o-l.co.za



Evans Consulting Engineers cc
17 Quarry Road, Vincent, East London 6247
(043) 721-5162
Darryl Evans
083 71026369
darryl@evansconsulting.co.za



BVI Border
1st Floor, Eyre's House, St Helena Drive
East London, 6241
(043) 122 2788
Werner de Lange
082 578 0674
WernerD@bvi.co.za



Newground Projects
17 St Andrews Road, Selborne,
East London, 6201
(043) 722 2864
Leah Foorie
0820 769828
Leah@newground.co.za



CS Consulting
13 Pheasant Street, Harroway House
Bersea, East London 6241
Craig Sim
0795287147
Craig@csconsulting.co.za



BSW Van Niekkerk
The Ridge Office Park, 2nd Floor
3 Bersea Terrace, Bersea, East London
(043) 721 1343
Willen van Niekkerk
0824671665
willen@bsw.co.za

Client



Architects



Osmond Lange Architects and Planners (Pty) Ltd East London
Postal: Private Bag X3, Tecoma 5214

Address: Pilot Mill House
The Quarry
Selborne, East London
Tel: (043) 721-0033
Fax: (043) 721-0038
Email: olael@o-l.co.za

Project

PROPOSED DATA CENTRE ON ERF 60917

DOOR SCHEDULE - SHEET 3

Date05/03/2020

Scale1 : 50

Drawn

Checked

Approved

PM

WM

WM

Workstage

FOR TENDER

Drawing Number

E1439-DCX-AR-602

Revision

A

2020/03/17 11:07:55