



PLAN - ERF CHANNEL INLET TYPE A
SCALE 1:20

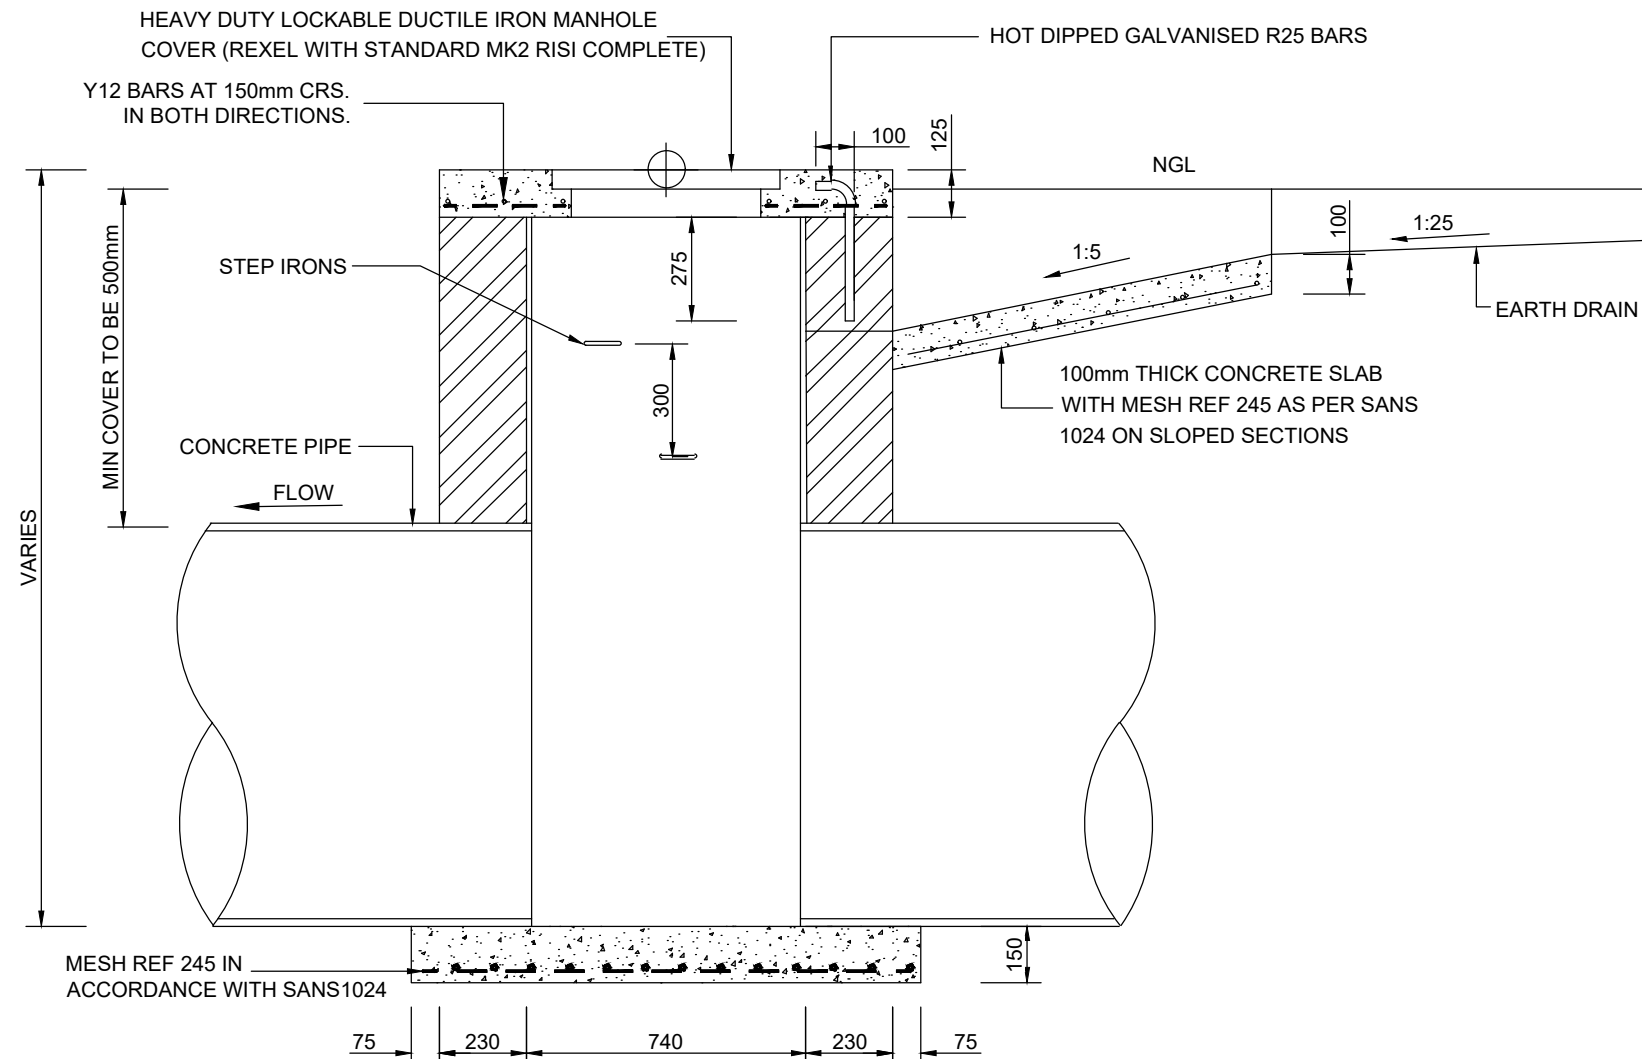


SECTION A-A
SCALE 1:20

CHAMBER SCHEDULE				
DEPTH BELOW COVER	BRICKWORK THICKNESS	REINFORCING STEEL AT EACH COURSE		BASE SLAB THICKNESS
m	mm	No.	mm	mm
UP TO 2	230	2	Y6	150
2 TO 5	345	2	Y6	200
5 TO 8	575	2	Y8	300

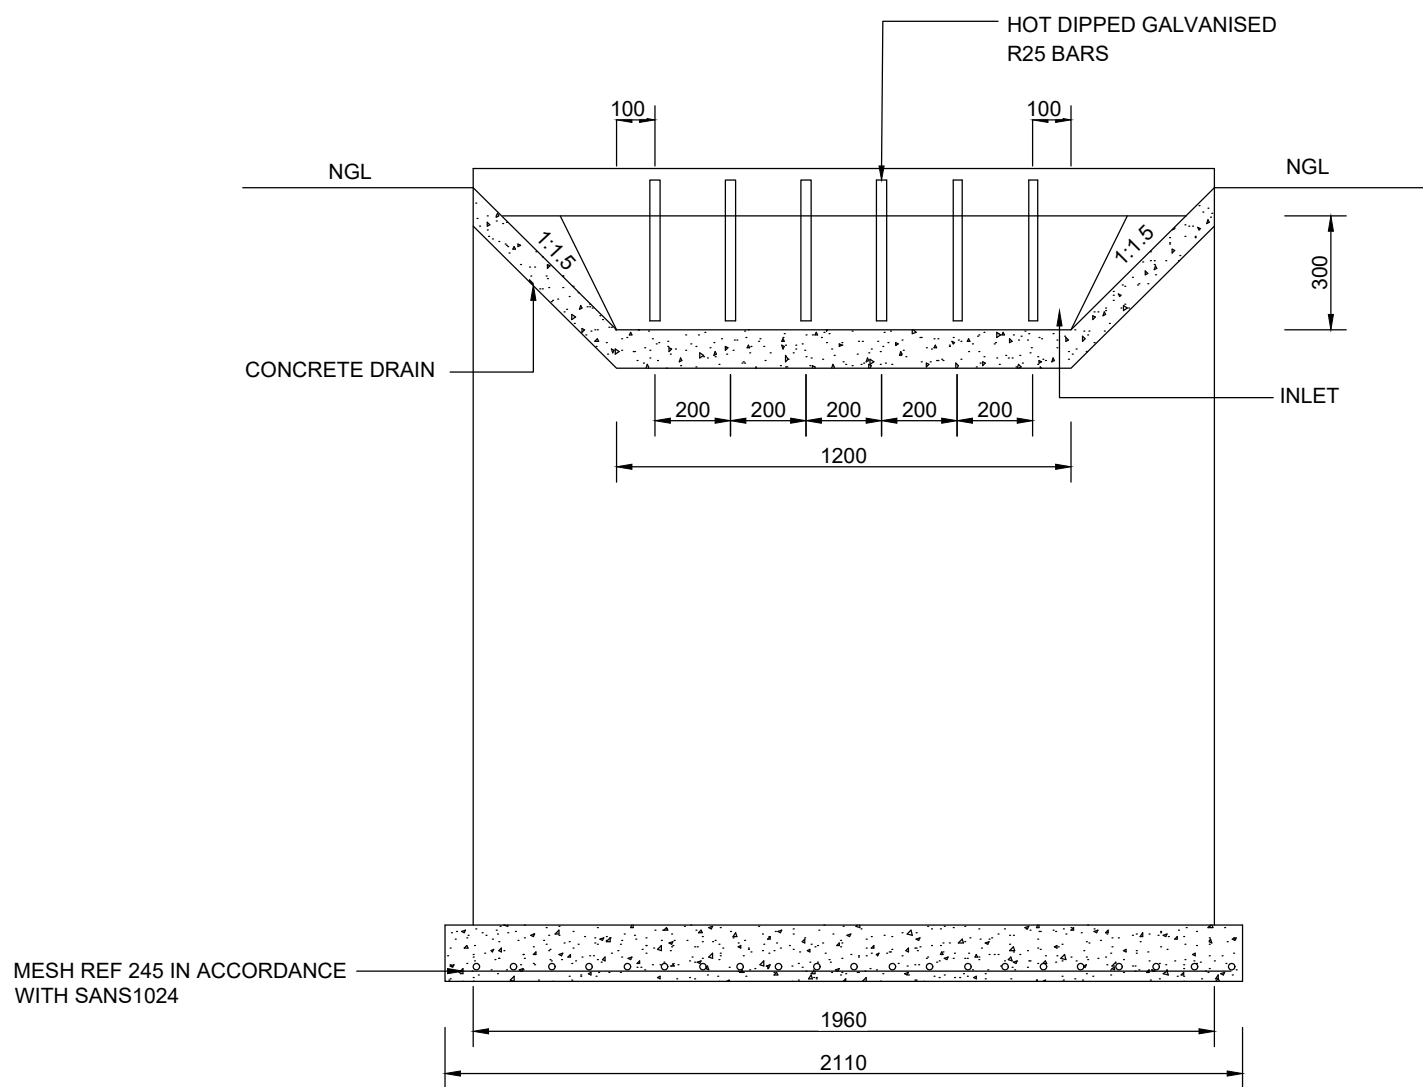

SECTION B-B
SCALE 1:20

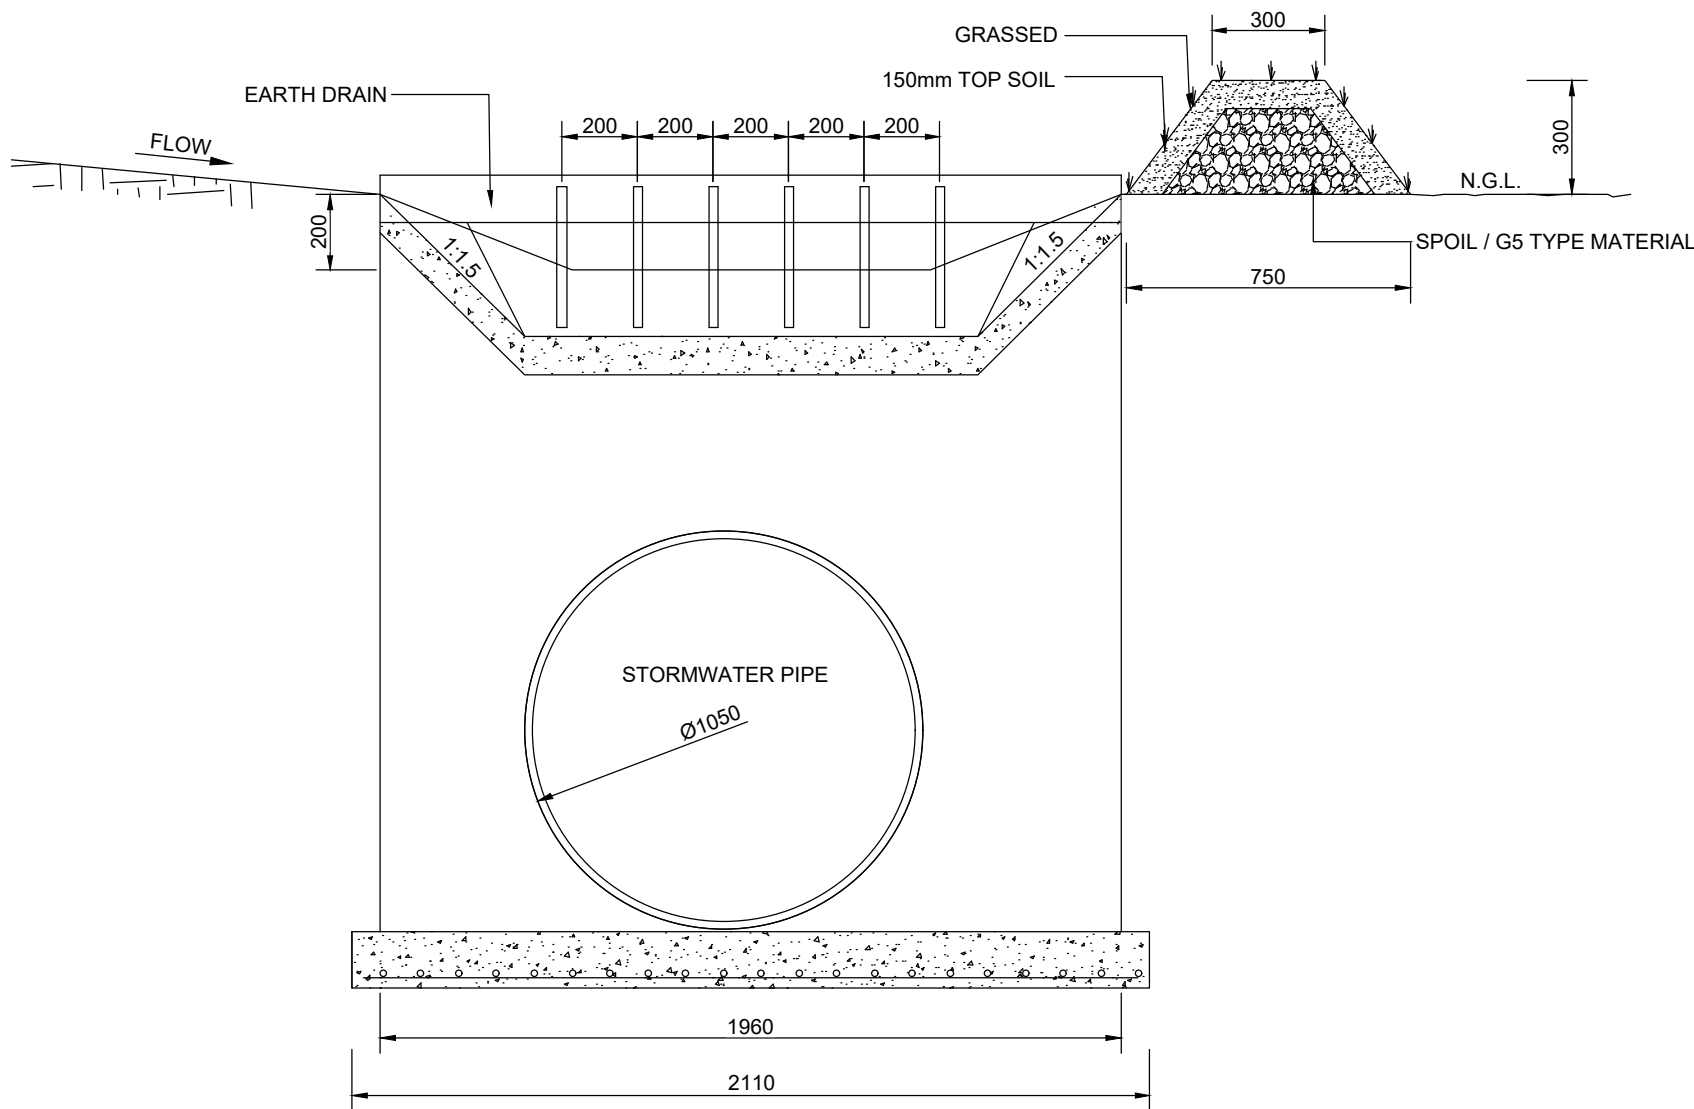

SECTIONAL VIEW
SCALE 1:20

- NOTES:
- "CALCAMITE" STEP IRONS TO BE PROVIDED IN MANHOLES > 1,0m DEEP
 - STEP IRONS TO BE SPACED AT 300mm CRS VERTICALLY AND STAGGERED AT 200mm CRS HORIZONTALLY. STARTING 500mm BELOW COVER LEVEL.
 - BENCHING TO BE FINISHED WITH MIN. 20mm THICK 1 : 5 CEMENT MORTAR

Osmond Lange Architects and Planners (Pty) Ltd East London

Postal: P O Box 19175, Tecoma, 5214

Address: Pilot Mill House The Quarry Selborne, East London

Tel: (043) 721-0033 Fax: (043) 721-0035 Email: oal@oal.co.za

The design and content of this drawing is the property of Osmond Lange Architects and the copyright thereof is reserved by them.

GENERAL NOTE

1. ALL STRUCTURAL, ELECTRICAL, CIVIL AND LANDSCAPING QUERIES ARE TO BE REFERRED TO THE RELEVANT CONSULTANT'S DRAWINGS, SPECIFICATIONS AND DETAILS.

2. ALL PLUMBING QUERIES ARE TO BE REFERRED TO THE RELEVANT SPECIALIST CONSULTANT'S DRAWINGS, SPECIFICATIONS AND DETAILS.

3. ALL CONCRETE, COLUMNS AND STRUCTURAL QUERIES ARE TO BE REFERRED TO THE STRUCTURAL ENGINEER'S DRAWINGS, SPECIFICATIONS AND DETAILS.

4. ALL EXTERNAL/INTERNAL WALLS REQUIRING BRACING / STIFFENING ARE TO BE CONSTRUCTED IN ACCORDANCE WITH THE STRUCTURAL ENGINEER'S DRAWINGS, SPECIFICATIONS AND DETAILS.

5. ALL SPOILING AND CONSTRUCTION TO COMPLY WITH THE RELEVANT SANS REGULATIONS.

6. ANY DISCREPANCY IN THE DRAWINGS, DIMENSIONS & SPECIFICATIONS TO BE BROUGHT TO THE ATTENTION OF THE CONSULTANT AND ARCHITECT PRIOR TO ANY WORK BEING PUT IN HAND.

7. ONLY FIGURED DIMENSIONS TO BE FOLLOWED - SCALED DIMENSIONS OF DRAWINGS WILL NOT BE FOLLOVED

No	Date	Revision Description	By

PROJECT TEAM

Principal Agent/ Architects :

Osmond Lange Architects and Planners Pilot Mill House, The Quarry, Selborne East London (043) 721-0033 William Martinson 083 3256600 Williamm@oal.co.za

Civil & Structural Engineers :

BVI Border 1st Floor, Esprit House, St Helena Drive East London, 5241 043-7222 2729 Werner de Lange 082 578 0674 Werner.d.lange@bvi.co.za

CLEINT

PO Box 5458, Greenfields East London, 5208 Lower Chamber Road Sunningdale, 5201 East London, South Africa Tel: +27(0)437028200 Fax: +27(0)437064605 Email: info@elidz.co.za

CLIENT APPROVAL :

Gery Whitaker Project Manager Tel: 082 3463219 Email: gery@elidz.co.za

DATE :

TENANT

SUNDALE

NAME : TENANT APPROVAL :

DESIGNATION: DATE :

Project

Drawing Title

STORMWATER GENERAL DETAILS 3 OF 3

Date	01.06.2019	Drawn	Author
Scale	AS SHOWN	Checked	Checker

Approved

Name: Approver Reg No: PrArchE559

Signature: Date:

Practice: Osmond Lange Architects and Planners

Workstage

FOR INFORMATION

Drawing Number	Revision
33722-SUND-DET-4	