




WINDOW NUMBERS: W4  
QUANTITY: 1

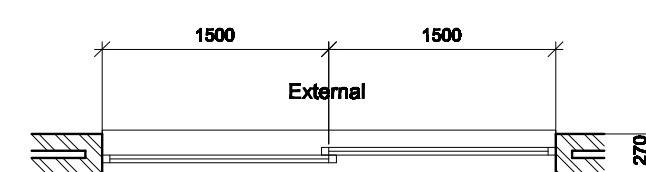



**REMOVE W54 AND W55  
SERVICE ALL CHECK IF ALL SEALS ARE  
IN PLACE. IF NOT IN PLACE- REPLACE.**

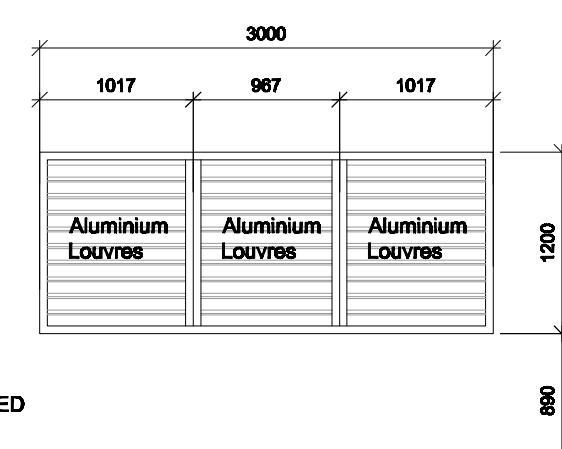

WINDOW NUMBERS: W54  
QUANTITY: 2

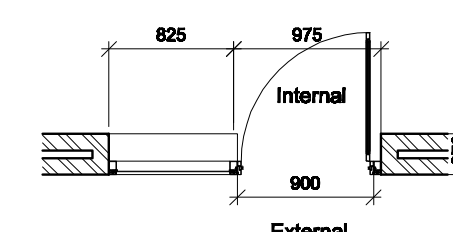


- All windows to have BLACK powder coated aluminium sections to later specification (50 - 100µ thick) and all joints are to be mechanically jointed
- All internal windows to be glazed with clear glass, in strict accordance with the current NBR Part N, SABS 0137/2000 Code of Practice: "The Installation of Glazing in Buildings", SABS 0400, SABS 1263 and AAAMA Selection Guide for Safety Glazing Materials as amended.
- See window schedule for specifications: SCH-8001
- All openings to be checked on site prior to fabrication.
- Design to be approved by Architect prior to fabrication.

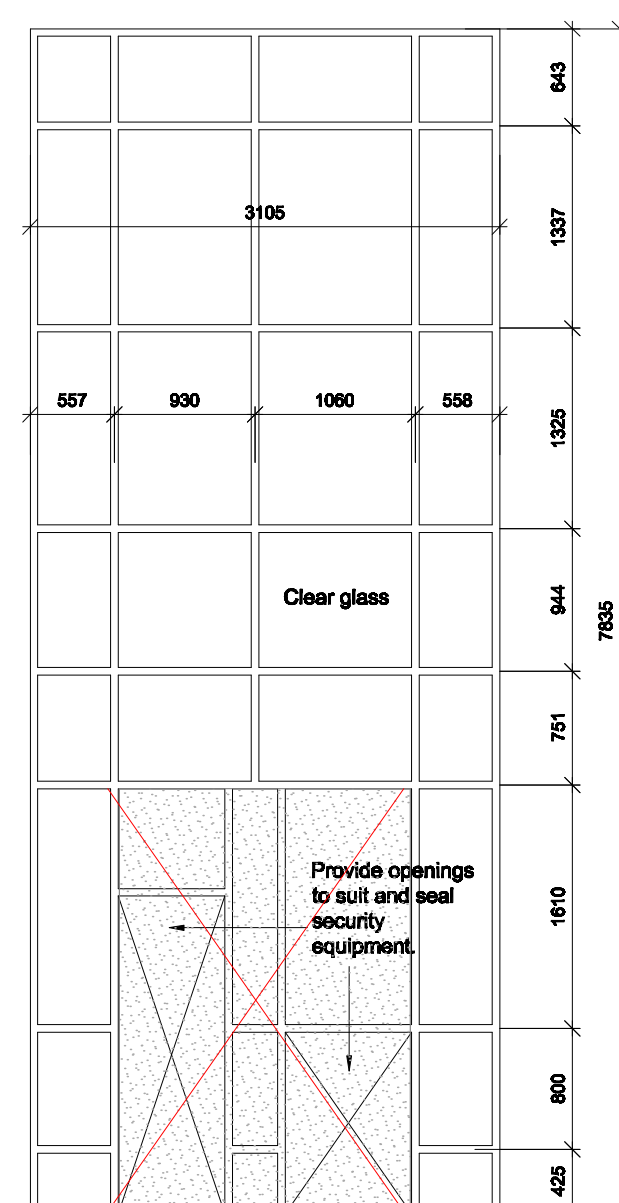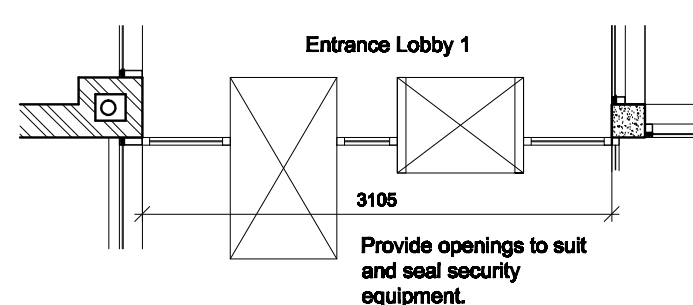

WINDOW NUMBERS: W46  
QUANTITY: 1


**RETAIN MAIN FRAME AND REMOVE DOORS AT MID SECTION . SERVICE ALL CHECK IF ALL SEALS ARE IN**

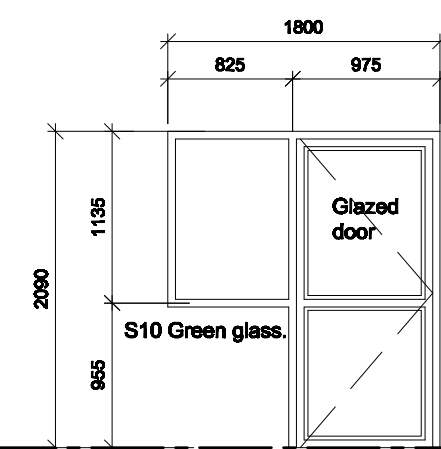


WINDOW NUMBERS: W58  
QUANTITY: 1

**MODIFY FIXED SECTION / REPLACE  
WITH OPENABLE SIDELIGHT**

**SERVICE ALL CHECK IF ALL SEALS  
ARE IN PLACE. IF NOT IN PLACE-  
REPLACE.**

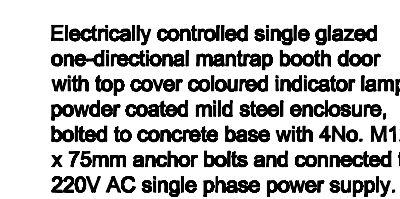

Ironmongery by manufacturer. Refer to ground floor plan, drawing EL/DIA/C-2000, for left/right hand door swing. Magnetic lock and Biometric access where indicated.

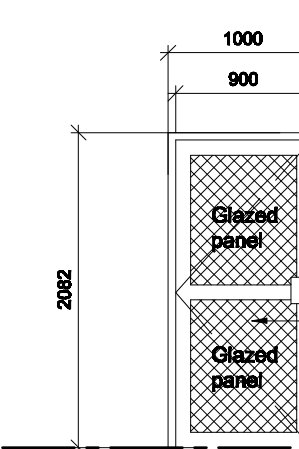

GLAZED DOOR  
NUMBERS: D01, D02, D03, D04, D05  
QUANTITY: 5

