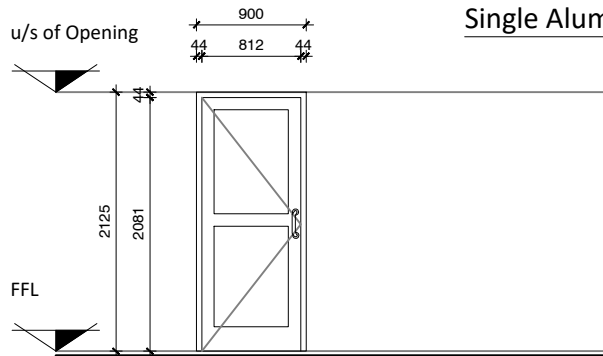


Single Aluminium Door


- After the door has been fit contractor has to take all necessary measures to protect the unit from on site damage.

TYPICAL ELEVATION

QUANTITY		TOTAL	01	LOCATION	Open office door
-----------------	--	--------------	----	-----------------	------------------

FRAME TYPE:

- 900mmx2125mm Aluminium door frame with 40mm rebate. Contractor to order correct quantity for 230mm/115mm applications and left/right hand opening.

DOOR TYPE:

- All aluminium to be Black. Coating supplied by manufacturer complying with SANS 999;2013.
- Size 812mm x 2081mm glazed with 6.35mm safety glass.
- Hung on three aluminium reflex hinges with nylon brushes.
- Clip on glazing beads with gasket seals and a high quality cylinder lock, plugged to brickwork or concrete.
- In accordance with AAAMSA selection guide for Glazed aluminium architectural products.

FINISH:

- Surfaces to receive 25µm powder coated black coating supplied by manufacturer complying with SANS 999;2013

GLAZING:
INTERNAL

- 6.38mm Clear laminated glass, complying with SANS 1263 Part 1, 2 or 3 with name of the manufacturer permanently marked on each sheet visible after glazing.
- Glazed in accordance with NBR N schedule 1 and SABS 0137.

EXTERNAL

- PG Smart Glass Solar Shield S20 Grey Normal Strength laminated reflective coated safety glass, complying with SANS 1263 Part 1, 2 or 3 with name of the manufacturer permanently marked on each sheet visible after glazing.

GENERAL:

- IRONMONGERY: as per ironmongery schedule
- **NOTE:**
Specialist / Manufacturer to take on site measurements prior to manufacture.
No scaling to be done from schedule drawings.

MDA ARCHITECTS
ISSUED FOR TENDER
DRAWING NUMBER:
DC-AR-1701
DATE:
04.10.2022
Revision:
00