


Manual Chain Operated Roller Shutter doors

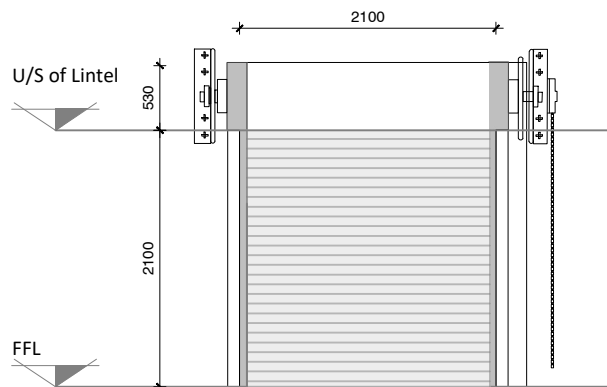

- After the door has been fitted, contractor is to take all necessary measures to protect the unit from on site damage.

TYPICAL ELEVATION

QUANTITY 2

LOCATION UPS

FRAME TYPE:

- Galvanised mild steel frame as per approved manufacturer.

DOOR TYPE:

- Serranda solid slated chain operated Roller Shutter door
- Doors to comprise of 75mm interlocking slats 0.6mm thick.
- 75mm wide side rails on doors.
- 2100 x 2100mm opening size.
- Finish: Galvanised steel

MECHANICS:

- Chain operated, latched internally

GLAZING:

- N/A

GENERAL:

- IRONMONGERY: as per ironmongery schedule
- NOTE:**
Specialist / Manufacturer to take on site measurements prior to manufacture.
No scaling to be done from schedule drawings.

MDA ARCHITECTS

ISSUED FOR TENDER

DRAWING NUMBER:

DC-AR-1735

DATE:

04.10.2022

Revision:

00