


Service Door

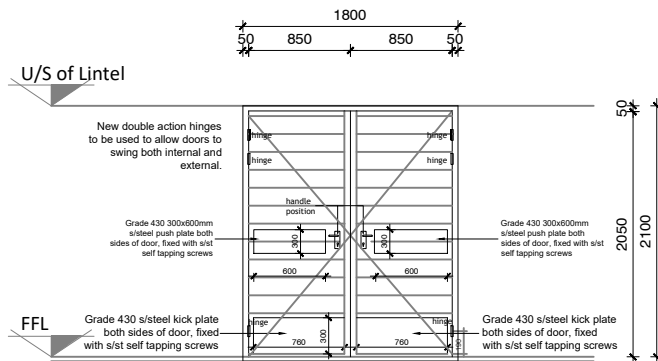

- After the door has been fitted, contractor is to take all necessary measures to protect the unit from on site damage.

TYPICAL ELEVATION

QUANTITY 01

LOCATION Service Entrance

FRAME TYPE:

- 75mmx100mm meranti hardwood frame with galv lugs at every 5th brick course for building into 230mm plastered brickwork walls.

DOOR TYPE:

- Custom made Swartland "Cape Culture" FLB solid external timber door as per manufacturers Specifications.
- Code: SD30
- 300x800mm S/S Kick plate, both sides, fixed with s/s self tapping screws.
- 300x600mm S/S push plate. both sides, fixed with s/s self tapping screws.

FINISH TO DOOR AND FRAME:

- Sand frame and doors, 3x finishing coats Woodoc 20 matt finish, sand between coats.
- Ensure edges (as well as top and bottom) of doors are sanded and painted (sealed) with finish as specified.

GENERAL:

- IRONMONGERY: As supplied. Ensure double action hinges.
- NOTE: Specialist / Manufacturer to take on site measurements prior to manufacture. No scaling to be done from schedule drawings.**

MDA ARCHITECTS

ISSUED FOR CONSTRUCTION

DRAWING NUMBER:

DC-AR-1705

DATE:

04.10.2022

Revision:

04