


Double Aluminium Door

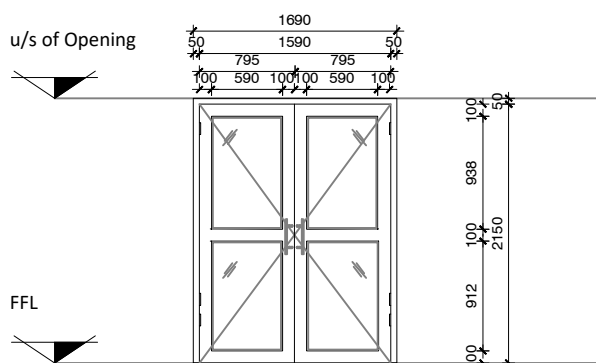

- After the door has been fit contractor has to take all necessary measures to protect the unit from on site damage.

TYPICAL ELEVATION

QUANTITY 01

LOCATION Boardroom

FRAME TYPE:

- 1690mmx2200mm Aluminium door frame with 40mm rebate. Contractor to order correct quantity for applications.

DOOR TYPE:

- All aluminium to be black. Coating supplied by manufacturer complying with SANS 999;2013.
- Size 2x 795mm x 2150mm glazed.
- Hung on three aluminium reflex hinges with nylon brushes.
- Clip on glazing beads with gasket seals and a high quality cylinder lock, plugged to brickwork or concrete.
- In accordance with AAAMSA selection guide for Glazed aluminium architectural products.

FINISH:

- Surfaces to receive 25µm powder coated black coating supplied by manufacturer complying with SANS 999;2013

GLAZING:

- 6.34mm Laminated glass (translucent with pixel decal), complying with SANS 1263 Part 1, 2 or 3 with name of the manufacturer permanently marked on each sheet visible after glazing.
- Glazed in accordance with NBR N schedule 1 and SABS 0137.

GENERAL:

- IRONMONGERY: as per ironmongery schedule
- NOTE:**
Specialist / Manufacturer to take on site measurements prior to manufacture.
No scaling to be done from schedule drawings.

MDA ARCHITECTS

ISSUED FOR TENDER

DRAWING NUMBER:

DC-AR-1700

DATE:

04.10.2022

Revision:

00