


Gridnic Agencies Single Door

TO SPECIALIST DESIGN

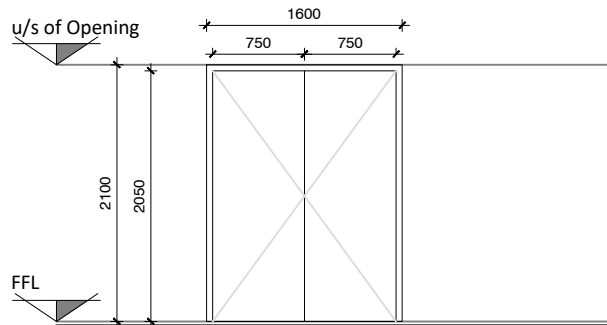

- After the door has been fit contractor has to take all necessary measures to protect the unit from on site damage.

TYPICAL ELEVATION

QUANTITY		TOTAL	3	LOCATION	Data Hall Entrance
-----------------	--	--------------	---	-----------------	--------------------

FRAME TYPE:

- 50mm Proprietary Natural Anodized frame, black Neoprene bubble door seal (3 sided seal) Standard Insulated Panel Frame.
- Surface to receive white powder coating, supplied by manufacturer complying with SANS 999:2013

DOOR TYPE:

- 2x 750mm wide x 2050mm high x 40mm thick composite door.
- Composite Material: 37mm Polystyrene Core 15kg/dm³

SPECIFICATIONS:

- **Finish:** 0.5mm Frost white Aluzinc - 150z Chromadek.
- Door Closer: N/A
- Hinges: 3 off H-series Aluminium Hinges
- Viewing Panel: N/A
- Protection Plate: N/A
- Kick Plate: N/A
- Push Plate: N/A

GENERAL:

- IRONMONGERY: as per ironmongery schedule
- **NOTE:**
Specialist / Manufacturer to take on site measurements prior to manufacture.
No scaling to be done from schedule drawings.

MDA ARCHITECTS
ISSUED FOR CONSTRUCTION
DRAWING NUMBER:

DC-AR-1702

DATE:

04.10.2022

Revision:

00