


DESCRIPTION					TYPE
INTERNAL QUALITY - STANDARD 2 HOUR SABS CLASS B FIRE RATED UN-EQUAL LEAF HINGED DOUBLE DOOR 1511 x 2400 x 48mm INCLUDING FRAME SUITABLE FOR 230mm BRICK WALL. SUPPLY AND INSTALL PYROPAVEL FIRE RATED DOORSET IN STRICT ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND IN COMPLIANCE WITH SABS 1253 : 2003 FOR A 120 MINUTE FIRE RATING WITH 3.6mm TREATED COMMERCIAL PLY SUITABLE FOR PAINTING ON BOTH SIDES, COLOUR: RAL 7016 - ANTHRACITE GREY, INCLUDING INTUMESCENT STRIP TO TOP OF DOOR, HARDWOOD EDGES, SPECIFIED IRONMONGERY AND HINGED ONE SIDE TO SUITABLE 1.6mm GAUGE DOUBLE REBATED GALVANIZED STEEL FRAME. 100x300mm DOUBLE GLAZED CLEAR GEORGIAN WIRE VIEWING PANEL WITH BRUSHED STAINLESS STEEL FRAME TO EACH LEAF.					FD-3

DOOR NO	ROOM DESCRIPTION	NAME	NO.	ACTIVE LEAF	HAND	DOOR CONSTRUCTION	GLAZING
22	CORRIDOR LOBBY 1	88			RS	1511 2400	APPROVED SAFETY GLAZING
23	SERVICES CORRIDOR 1	66				1511 2400	APPROVED SAFETY GLAZING
25	SERVICES CORRIDOR 2	67				1511 2400	APPROVED SAFETY GLAZING
116	CEILING VOID ABOVE ISOPHEN CEILINGS	130				1511 2400	APPROVED SAFETY GLAZING

CLASS B FIRE DOOR
INTERNAL QUALITY
ACCESS CONTROLLED

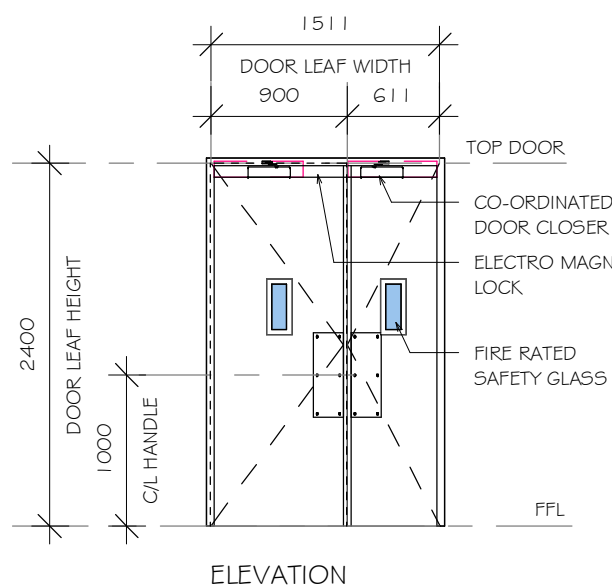


TYPE

FD-3

DESCRIPTION					TYPE
EXTERNAL QUALITY - STANDARD 1 HOUR SABS CLASS A FIRE RATED UN-EQUAL LEAF HINGED DOUBLE DOOR 1511 x 2400 x 48mm INCLUDING FRAME SUITABLE FOR 230mm BRICK WALL. SUPPLY AND INSTALL PYROPAVEL FIRE RATED DOORSET IN STRICT ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND IN COMPLIANCE WITH SABS 1253 : 2003 FOR A 60 MINUTE FIRE RATING WITH 3.6mm TREATED COMMERCIAL PLY SUITABLE FOR PAINTING ON BOTH SIDES, COLOUR: RAL 7016 - ANTHRACITE GREY, INCLUDING INTUMESCENT STRIP TO TOP OF DOOR, HARDWOOD EDGES, SPECIFIED IRONMONGERY AND HINGED ONE SIDE TO SUITABLE 1.6mm GAUGE DOUBLE REBATED GALVANIZED STEEL FRAME. 100x300mm DOUBLE GLAZED CLEAR GEORGIAN WIRE VIEWING PANEL WITH BRUSHED STAINLESS STEEL FRAME TO EACH LEAF.					FD-4

DOOR NO	ROOM DESCRIPTION	NAME	NO.	ACTIVE LEAF	HAND	DOOR CONSTRUCTION	GLAZING
24	MAINTENANCE STAIR	129			RS	1511 2400	APPROVED SAFETY GLAZING

CLASS A FIRE DOOR
EXTERNAL QUALITY
ACCESS CONTROLLED

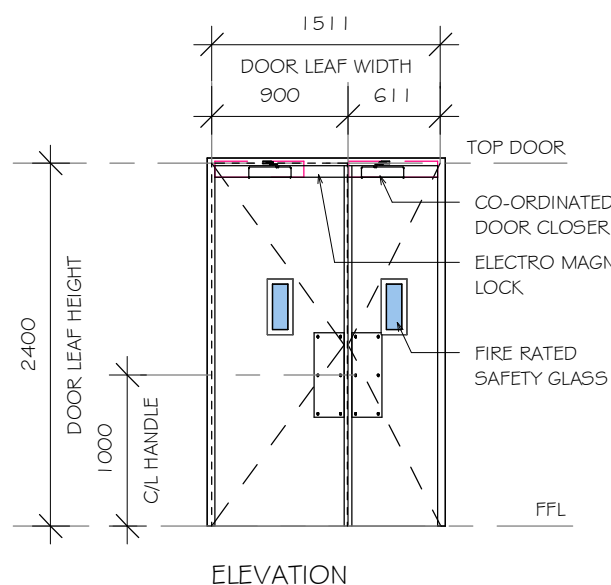


TYPE

FD-4

DESCRIPTION					TYPE
INTERNAL QUALITY - STANDARD 2 HOUR SABS CLASS B FIRE RATED HINGED SINGLE DOOR 813 x 2400 x 48mm INCLUDING FRAME SUITABLE FOR 230mm BRICK WALL. SUPPLY AND INSTALL PYROPAVEL FIRE RATED DOORSET IN STRICT ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND IN COMPLIANCE WITH SABS 1253 : 2003 FOR A 120 MINUTE FIRE RATING WITH 3.6mm TREATED COMMERCIAL PLY SUITABLE FOR PAINTING ON BOTH SIDES, COLOUR: RAL 7016 - ANTHRACITE GREY, INCLUDING INTUMESCENT STRIP TO TOP OF DOOR, HARDWOOD EDGES, SPECIFIED IRONMONGERY AND HINGED ONE SIDE TO SUITABLE 1.6mm GAUGE DOUBLE REBATED GALVANIZED STEEL FRAME. 100x300mm DOUBLE GLAZED CLEAR GEORGIAN WIRE VIEWING PANEL WITH BRUSHED STAINLESS STEEL FRAME TO EACH LEAF.					FD-5

DOOR NO	ROOM DESCRIPTION	NAME	NO.	ACTIVE LEAF	HAND	DOOR CONSTRUCTION	GLAZING
13	ESCAPE STAIR LOBBY	126				813 2400	APPROVED SAFETY GLAZING
14	ESCAPE STAIR LOBBY	126				813 2400	APPROVED SAFETY GLAZING

CLASS B FIRE DOOR
INTERNAL QUALITY
PANIC DEVICE

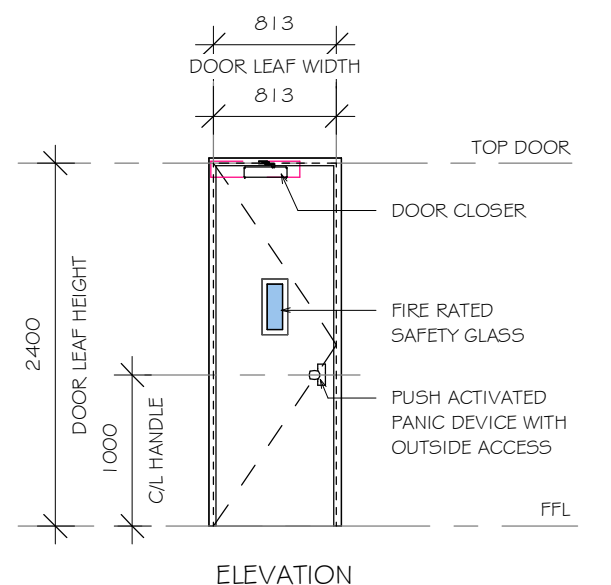


TYPE

FD-5

DESCRIPTION					TYPE
EXTERNAL QUALITY - STANDARD 2 HOUR SABS CLASS B FIRE RATED UN-EQUAL LEAF HINGED DOUBLE DOOR 1511 x 2400 x 48mm INCLUDING FRAME SUITABLE FOR 230mm BRICK WALL. SUPPLY AND INSTALL PYROPAVEL FIRE RATED DOORSET IN STRICT ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND IN COMPLIANCE WITH SABS 1253 : 2003 FOR A 120 MINUTE FIRE RATING WITH 3.6mm TREATED COMMERCIAL PLY SUITABLE FOR PAINTING ON BOTH SIDES, COLOUR: RAL 7016 - ANTHRACITE GREY, INCLUDING INTUMESCENT STRIP TO TOP OF DOOR, HARDWOOD EDGES, SPECIFIED IRONMONGERY AND HINGED ONE SIDE TO SUITABLE 1.6mm GAUGE DOUBLE REBATED GALVANIZED STEEL FRAME.					FD-6

DOOR NO	ROOM DESCRIPTION	NAME	NO.	ACTIVE LEAF	HAND	DOOR CONSTRUCTION	GLAZING
15	ESCAPE STAIR	127				1511 2400	APPROVED SAFETY GLAZING

CLASS B FIRE DOOR
EXTERNAL QUALITY
ACCESS CONTROLLED

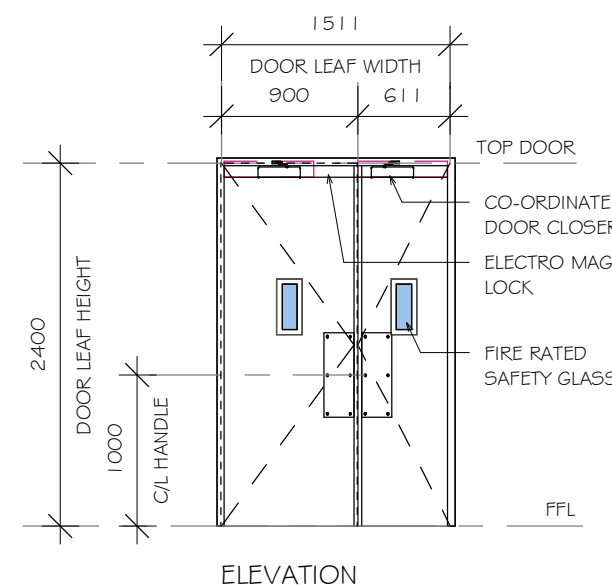


TYPE

FD-6

DESCRIPTION					TYPE
INTERNAL QUALITY - STANDARD 2 HOUR SABS CLASS B FIRE RATED UN-EQUAL LEAF HINGED DOUBLE DOOR 1511 x 2400 x 48mm INCLUDING FRAME SUITABLE FOR 230mm BRICK WALL. SUPPLY AND INSTALL PYROPAVEL FIRE RATED DOORSET IN STRICT ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND IN COMPLIANCE WITH SABS 1253 : 2003 FOR A 120 MINUTE FIRE RATING WITH 3.6mm TREATED COMMERCIAL PLY SUITABLE FOR PAINTING ON BOTH SIDES, COLOUR: RAL 7016 - ANTHRACITE GREY, INCLUDING INTUMESCENT STRIP TO TOP OF DOOR, HARDWOOD EDGES, SPECIFIED IRONMONGERY AND HINGED ONE SIDE TO SUITABLE 1.6mm GAUGE DOUBLE REBATED GALVANIZED STEEL FRAME TO EACH LEAF.					FD-7

DOOR NO	ROOM DESCRIPTION	NAME	NO.	ACTIVE LEAF	HAND	DOOR CONSTRUCTION	GLAZING
110	ESCAPE STAIR					1511 2400	APPROVED SAFETY GLAZING

CLASS B FIRE DOOR
INTERNAL QUALITY
PANIC DEVICE

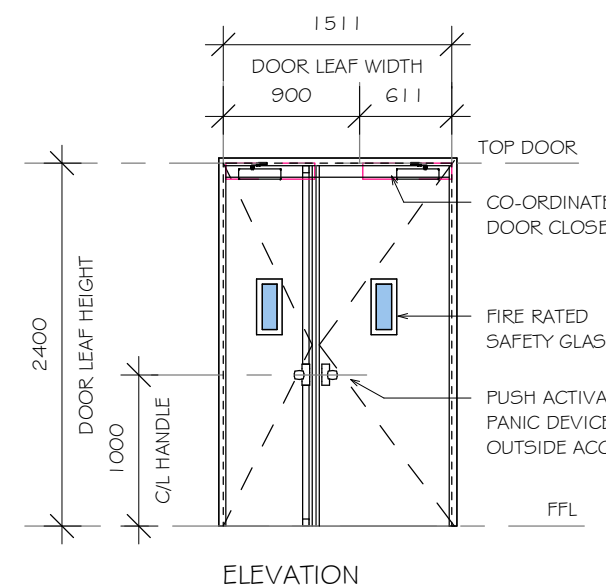

TYPE

FD-7

DOOR NUMBER	DOOR TYPE	ROOM NUMBER	ROOM NAME	ACTIVE LEAF	HAND	FIRE RATING	REMARKS
01	SF-1	111	WIND LOBBY				ACCESS CONTROL
02	SF-1	16	RECEPTION		LH		ACCESS CONTROL
03	D-1	16	RECEPTION				ACCESS CONTROL
04	FD-2	16	RECEPTION			2HR	FIRE DOOR WITH ACCESS CONTROL
05	SF-2	115	CIRCULATION		LH DD		ACCESS CONTROL
06	D-2	104	TEA PREP 1				
07	D-3	97	FHR				
08	D-4	96	ELECTRICAL				
09	D-5	95	CLEANERS ROOM				
10	D-6	93	DISABILITY WC				
11	D-13	92	DUCT 1		LH		DUCT
12	SF-3	17	NETWORK OPERATIONS				
13	FD-5	126	ESCAPE STAIR LOBBY			2HR	PUSH-PAD PANIC DEVICE
14	FD-5	126	ESCAPE STAIR LOBBY			2HR	PUSH-PAD PANIC DEVICE
15	FD-6	127	ESCAPE STAIR			2HR	FIRE DOOR WITH ACCESS CONTROL
16	FD-2	60	DATA CENTRE HALL 1			2HR	FIRE DOOR WITH ACCESS CONTROL
17	FD-1	60	DATA CENTRE HALL 1			2HR	FIRE DOOR WITH ACCESS CONTROL
18	FD-2	14	DATA CENTRE HALL 2			2HR	FIRE DOOR WITH ACCESS CONTROL
19	FD-1	14	DATA CENTRE HALL 2			2HR	FIRE DOOR WITH ACCESS CONTROL
20	FD-2	13	DATA CENTRE HALL 3			2HR	FIRE DOOR WITH ACCESS CONTROL
21	FD-1	13	DATA CENTRE HALL 3			2HR	FIRE DOOR WITH ACCESS CONTROL
22	FD-3	88	CORRIDOR LOBBY 1		RS	2HR	FIRE DOOR WITH ACCESS CONTROL
23	FD-3	66	SERVICES CORRIDOR 1			2HR	FIRE DOOR WITH ACCESS CONTROL
24	FD-4	129	MAINTENANCE STAIR		RS	1HR	FIRE DOOR WITH ACCESS CONTROL
25	FD-3	67	SERVICES CORRIDOR 2			2HR	FIRE DOOR WITH ACCESS CONTROL
26	FD-1	11	DATA CENTRE HALL 4			2HR	FIRE DOOR WITH ACCESS CONTROL
27	FD-2	12	CIRCULATION 1			2HR	FIRE DOOR WITH ACCESS CONTROL
28	FD-1	10	CARRIER HOTEL			2HR	FIRE DOOR WITH ACCESS CONTROL
29	FD-2	12	CIRCULATION 1			2HR	FIRE DOOR WITH ACCESS CONTROL
30	FD-1	55	DATA CENTRE HALL 5			2HR	FIRE DOOR WITH ACCESS CONTROL
31	FD-2	55	DATA CENTRE HALL 5			2HR	FIRE DOOR WITH ACCESS CONTROL
32	SF-2	128	RECEIVING LOBBY				ACCESS CONTROL
33	SF-2	63	RECEIVING AREA				ACCESS CONTROL
34	RS-2	63	RECEIVING AREA				ACCESS CONTROL
35	SF-4	63	RECEIVING AREA				ACCESS CONTROL
36	RS-1	12	CIRCULATION 1				
37	RS-1	58	STORE ROOM 2				
38	RS-1	57	STORE ROOM 1				
39	SF-2	56	STAGING AREA				ACCESS CONTROL
40	FD-1	15	MEET-ING ROOM 1			2HR	FIRE DOOR WITH ACCESS CONTROL
41	D-8	38	MALE WC 3				
42	D-7	18	FEMALE WC 3				
43	D-8	73	WC				
44	D-9	84	GENERATOR RM 2				ACCESS CONTROL
45	D-10	87	UPS ROOM 2				ACCESS CONTROL
46	D-9	85	FIRE SUPPRESSION RM 2				ACCESS CONTROL
47	D-10	83	LV RM 2				ACCESS CONTROL
48	D-10	82	TX ROOM 2				ACCESS CONTROL
49	D-10	81	MV ROOM 2				ACCESS CONTROL
50	D-10	74	MV ROOM 1				ACCESS CONTROL
51	D-10	75	TX ROOM 1				ACCESS CONTROL
52	D-10	76	LV RM 1				ACCESS CONTROL
53	D-9	79	PASSAGE 1				ACCESS CONTROL
54	D-10	80	UPS ROOM 1				ACCESS CONTROL
55	D-9	77	GENERATOR RM 1				ACCESS CONTROL
56	D-8	132	GATEHOUSE WC				
57	SF-6	131	GATEHOUSE				
101	D-8	99	MALE WC 2				
102	D-7	100	FEMALE WC 2				
103	D-3	103	FHR				
104	D-4	102	ELECTRICAL				
105	D-2	106	TEA PREP 2				
106	D-11	110	SERVER RM				ACCESS CONTROL
107	SF-5	118	FINANCE 1		RH		
108	SF-5	119	FINANCE 2		RH		
109	SF-2	65	BALCONY 2				ACCESS CONTROL
110	FD-7	127	ESCAPE STAIR			2HR	PUSH-PAD PANIC DEVICE
111	SF-3	109	MEETING ROOM 2				ACCESS CONTROL
112	SF-2	36	CIRCULATION				ACCESS CONTROL
113	SF-2	111	WIND LOBBY				ACCESS CONTROL
114	SF-3	125	EXECUTIVE PASSAGE		RH		
115	SF-3	125	EXECUTIVE PASSAGE		RH		
116	SF-2	125	EXECUTIVE PASSAGE				ACCESS CONTROL
117	D-12	122	BALCONY 1				
118	FD-3	130	CEILING VOID ABOVE ISOPHEN CEILINGS			2HR	FIRE DOOR WITH ACCESS CONTROL
119	FD-1	133	MEET-ING ROOM 2			2HR	FIRE DOOR WITH ACCESS CONTROL

The design and content of this drawing is the property of
Osmond Lange Architects and the copyright thereof is reserved by them.

OL

OSMOND LANGE

OSMOND LANGE ARCHITECTS + PLANNERS

17 Barry Road, The Quarry, Selborne
East London 5201
(043) 721-0033
043 721 1343
0820766028
lola@osmond.co.za

newground

ARCHITECTS

newground architects

17 Barry Road, The Quarry, Selborne
East London 5201
(043) 721-0033
043 721 1343
0820766028
lola@osmond.co.za

CS

CONSULTING

CS Consulting

17 Barry Road, The Quarry, Selborne
East London 5201
(043) 721-0033
043 721 1343
0820766028
lola@osmond.co.za

bvi

BOVIER VAN NIEKERK INC.

BOVIER VAN NIEKERK INC.

17 Barry Road, The Quarry, Selborne
East London 5201
(043) 721-0033
043 721 1343
0820766028
lola@osmond.co.za

Client

Architects

Project

Osmond Lange Architects and
Planners (Pty) Ltd East London
Postal: Private Bag X3, Tecoma 5214

Address: Pilot Mill House
The Quarry
Selborne, East London
Tel: (043) 721-0033
Fax: (043) 721-0038
Email: olael@o-l.co.za

PROPOSED DATA CENTRE ON ERF
60917

DOOR SCHEDULE - SHEET 2

19/02/2020

Scale 1 : 50

Workstage

Drawing Number E1439-AR-8202

Drawn PM

Checked WM

Approved WM

Revision